

LumiBeads™ 8501F

Premium Drop-On Glass Bead

PRODUCT DATA

Product Type : Drop-On Glass Bead
Product Name : LumiBeads™ 8501F
Product Colours : Clear
Revision Date : 1st January 2020

Product Description:

LumiBeads™ 8501F (EN 1423) are premium beads with the best price-performance ratio for high-quality applications and results. Combines the advantages of standard beads and high-performance beads.

Application:

- Best quality drop-on, especially with high requirement for wet-night reflection
- Can be applied with standard road marking equipment.
- Best quality drop-on, especially with high requirement for wet-night reflection
- Can be applied with standard road marking equipment.
- Improved night visibility of road markings.

Packaging:


Available in 1MT increments. The ton is divided into 50 bags each weighing 20kg.

Storage:

Store at room temperature. Store in a dry place. Very slippery when spilled, clean up spills immediately. This product is designed for use with pavement marking and may not be suitable for other applications. Stock should be rotated as extended storage may lead to clumps forming. Product must be kept cool in a dry, covered protected area between 5°C – 35°C and must be stored out of direct sunlight.

Safety & Transport:

Refer MSDS

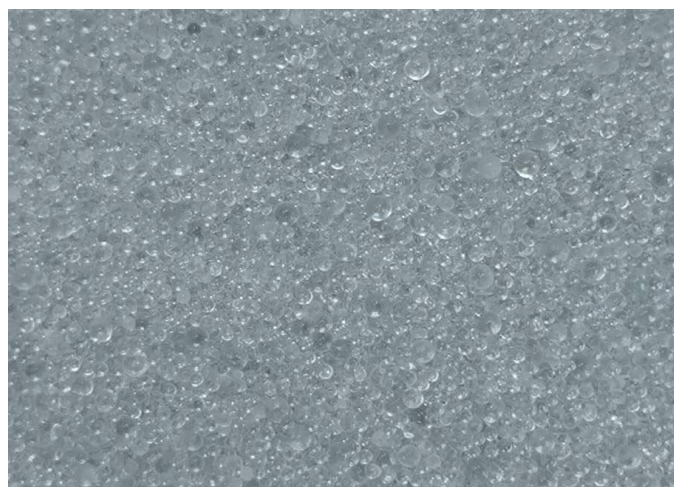

Physical Characteristics:

Specific Gravity	2.4 – 2.6 g/cm ³
Roundness	> 80%
Refractive Index	≥ 1.50 (nD)
Gradation	125 – 850 μm

The product data offered herein is, to the best of our knowledge, true and accurate, but all recommendations are made without warranty, expressed or implied. Because the conditions of use are beyond our control, neither Ennis-Flint nor its agents shall be liable for any injury, loss or damage, direct or consequential, arising from the use or the inability to use the product described herein. As Ennis-Flint has neither control over the installation of product described herein nor control of the environmental factors the installed markings are subjected to, there is no guarantee as to the durability or the retroreflective properties of any marking system applied. No person is authorized to make any statement or recommendation not contained in the Product Data, and any such statement or recommendation, if made, shall not bind the Corporation. Further, nothing contained herein shall be construed as a recommendation to use any product in conflict with existing patents, and no license under the claims of any patent is either implied or granted.